


# D220

## MiniPOS

Onmi-channel Payment | Contactless,  
EMV chip & magstripe | Supports 1D /  
2D Code Scanning | 4G, 3G, Bluetooth,  
WiFi connectivity | Wireless Charging

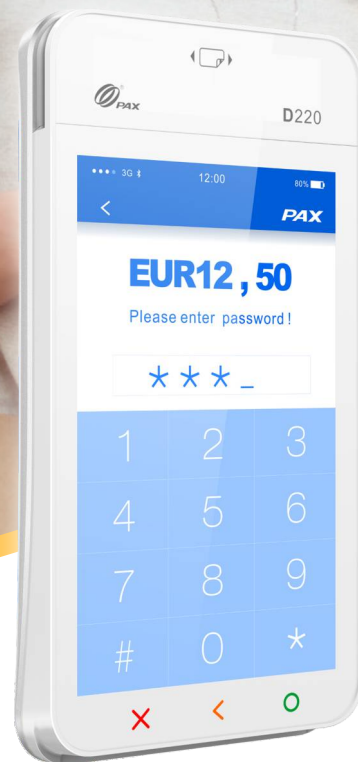

The D220 – the world’s most innovative payment device offers merchants and cardholders alike a whole new experience, either as a traditional mPOS when integrating with mobile payment apps running on iOS or Android smart devices via Bluetooth, or as a standalone MiniPOS when connecting over 3G, 4G & WiFi. The D220 comes

packed with the industry certifications including PCI PTS 4.x, SRED and NFC contactless including Visa payWave, MasterCard Contactless, Amex Expresspay and Discover D-PAS.

# FEATURES & BENEFITS

## Exceptional Performance

- Optional Rear Camera for Code Scanning (1D & 2D)
- Accepts Contactless, EMV Chip, Magstripe
- Keeping Transactions Going All Day Long
- High quality 4-inch touch colour screen

## Expansibility & Security

- Optional wireless power charger
- Optional multiple connectivity
- Secure key embedded area
- PCI PTS 4.x, SRED



# D220 Mini POS

## SPECIFICATIONS

<b>OS</b>	Prolin
<b>Processor</b>	Cortex-A9, 1GHz
<b>Memory</b>	512MB DDR + 512MB Flash
<b>Card Readers</b>	Magnetic Card Reader   Smart Card Reader   Contactless Card Reader
<b>Camera</b>	0.3 Megapixel Fixed Focus Rear Camera (optional) Reads 1D & 2D Codes
<b>Display</b>	4-inch TFT Colour Display   480 x 800 pixels   Capacitive Touchscreen
<b>Audio</b>	1 x Speaker
<b>Virtual Keypad</b>	1 x Enter   1 x Cancel   1 x Clear   Touch Key
<b>Communications</b>	WiFi (2.4G) + Bluetooth 4.0 & 2.1   4G (FDD-LTE)(optional) 3G (WCDMA / CDMA2000) (optional)
<b>Card Slots</b>	1 x Micro SIM + 1 x Micro SAM
<b>Peripheral Ports</b>	1 x Micro USB 2.0
<b>Battery</b>	3.7V / 3050mAh Rechargeable Li-ion Battery
<b>Adapter</b>	Input: 100 - 240V AC, 50Hz / 60Hz   Output: 5.0V DC, 2.0A
<b>Location</b>	GPS (optional)
<b>Accessories</b>	Wireless Charging Base (optional)
<b>Physical</b>	L x W x H (mm) : 136.5 x 70 x 17.4   Weight (g) : 182 (Including Battery)
<b>Environmental</b>	0°C ~ 50°C (32°F ~ 122°F) Operating Temperature -20°C ~ 70°C (-4°F ~ 158°F) Storage Temperature 10% ~ 93% Relative Humidity, Non-condensing
<b>Certifications</b>	PCI PTS 5.x, SRED   EMV L1 & L2   EMV Contactless L1   Visa payWave MasterCard Contactless   American ExpressPay   Discover D-PAS MasterCard TQM   J/Speedy L2   Mastercard mPOS   PTCRB   ABECS CE   FCC   Anatel   RoHS

